


Conductor Tension Unit – CTU 220/31,5"

CDS

Castor Drilling Solution

www.cds.as

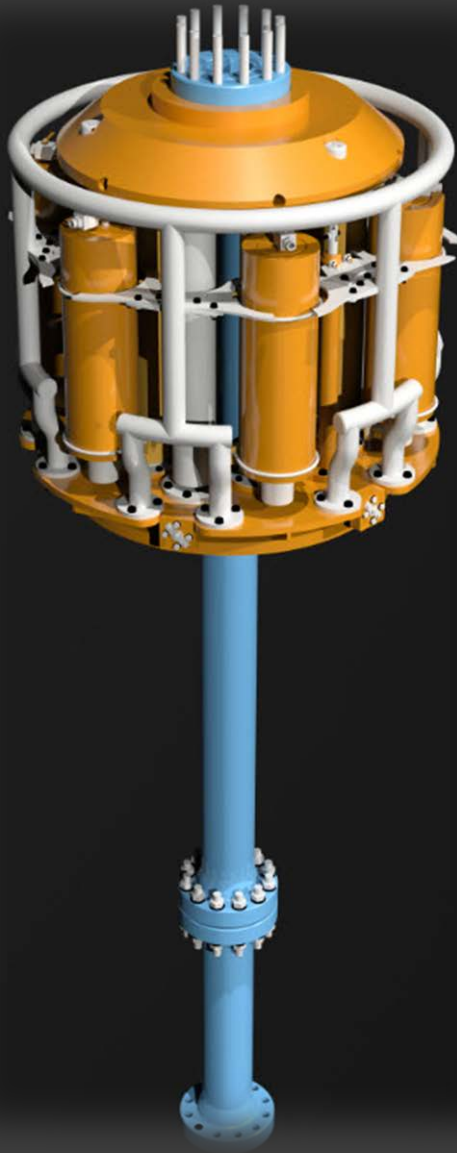

PRODUCT SPECIFICATION

Configuration:	Non Split Type
Compensating Capacity Normal Operation:	220 kips (100 mT)
Tension Ring Tilting Freedom:	$\pm 0,4^\circ$
Tension Ring Horizontal Travel Freedom:	± 10 mm
Total Compensating Stroke:	31,5" (800 mm)
Normal Operating Pressure:	780-1770 psi (54-122 Barg)
Max. Pressure:	2670 psi (184 Barg)
Number of Cylinders:	6 Off
Working Media – Fluid:	Hougho-Safe CTF 273 or Erifon 818 LTP
Working Media – Gas:	Nitrogen
Tension Ring Spacers:	500 mm / 1000 mm
CTU Bore Centralizer open:	$\text{Ø}560$ mm
CTU Bore Centralizer Closed:	268mm
CTU Upper and Lower Main Frame bore:	$\text{Ø}545$ mm
Total Weight – Dry:	5450 kg