


Modular Heave Compensator - MAHC 30/30mT-12.5

CDS

Castor Drilling Solution

www.cds.as

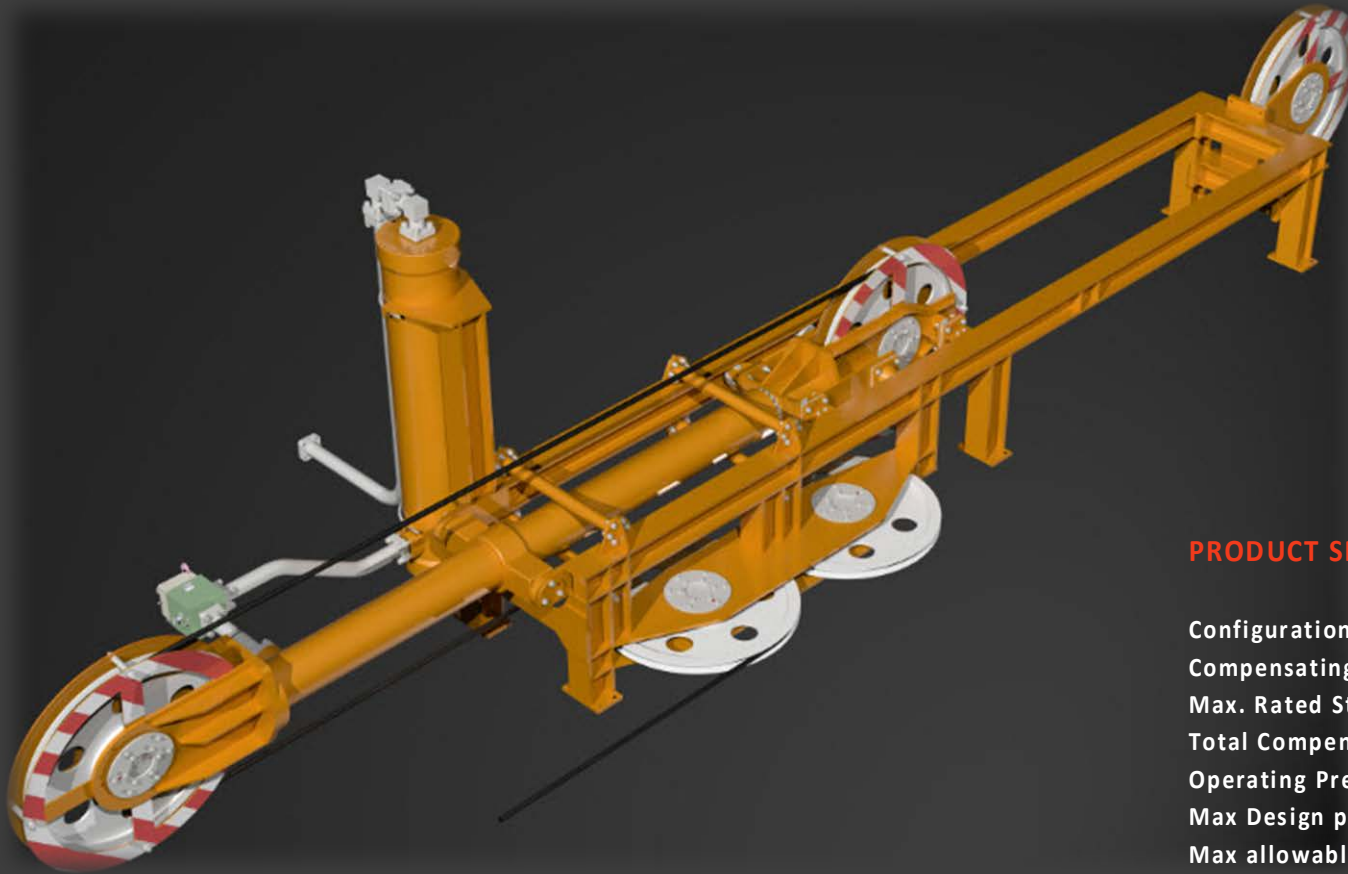

PRODUCT SPECIFICATION

Configuration	Single
Compensating Capacity Normal Operation:	30 mT
Max. Rated Static Capacity (Line Pull):	30 mT
Total Compensating Stroke:	12,5' (3810 mm)
Operating Pressure	0-207 Barg
Max Design pressure:	230 bar
Max allowable operating Pressure:	207 bar
Number of Cylinders:	1 Off
Working Media – Fluid Side:	Houghtho Safe CTF 273 or Erifon 818 TLP
Working Media – Gas side:	Nitrogen / Air
Max Wire Fleet Angle:	± 1,5°
Wire Sheave Thread Diameter DT:	~Ø54" (Ø1368 mm)
Wire Diameter:	Ø1 1/2" (Ø38 mm)
Turnover Sheave:	Optional
Total Weight Dry :	15.545 kg