


# Wireline Tensioning System - WLT 4000-50

**CDS**

Castor Drilling Solution

[www.cds.as](http://www.cds.as)

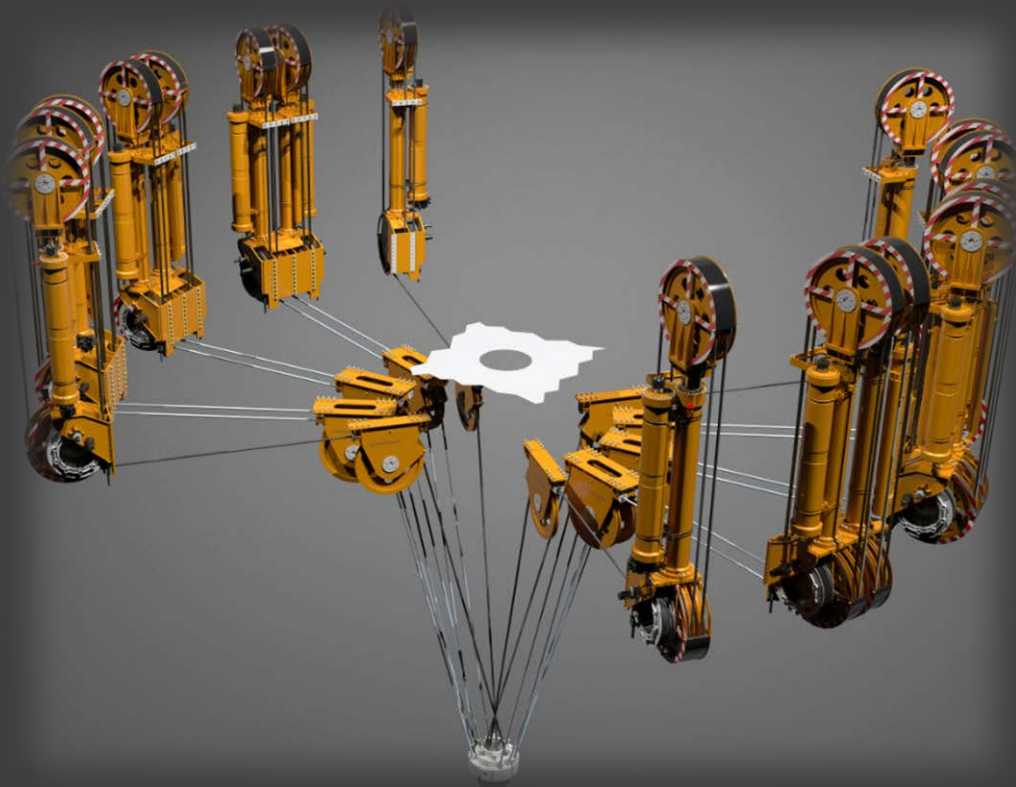

## PRODUCT SPECIFICATION

Total Compensating Stroke:	50' (15240 mm)
Normal Operating Pressure:	0-3000 psi (0-207 Barg)
Max. Operating Pressure:	3000 psi (207 Barg)
Number of Cylinders:	16 Off
Working Media – Fluid:	Houghtho-Safe CTF 273 or Erifon 818 LTP
Working Media – Gas:	Nitrogen / Air
Max. Wire Fleet Angle:	± 1,5°
Wiresheave Thread Diameter:	Ø82" (~Ø2083 mm)
Wire Diameter:	Ø2 3/4" (~Ø70 mm)
Snubber Unit Type:	Hydraulic
Working Pressure Vessel Battery Volume:	32x2000 = 64.000 Liter
Weight Wireline Units Dry:	558.788 kg
Weight Pressure Vessel Battery Dry:	55.506 kg
Weight Pressure Control Skid:	3500 kg
Total Weight – Dry:	617.794 kg